



# HYDRATED LIME

## PRODUCT DESCRIPTION

Hydrated Lime is a dry powder obtained by treating Quicklime with enough water to satisfy its chemical affinity for water.

Adelaide Brighton Hydrated Lime is ground and air classified to produce a fine white powder. Typically less than 0.05% is retained on a 250 micron sieve. Air classification also removes contaminants that are normally found in Quicklime.

### What is Lime?

Lime is one of man's oldest and most vital chemicals and is often confused with limestone, from which it is derived.

Quicklime is manufactured by calcining high quality limestone at elevated temperatures, which causes volatilising nearly half of the stone's weight as carbon dioxide.

Hydrated Lime in turn is produced by reacting Quicklime with sufficient water to form a dry white powder. Reactions are as follows:

- Limestone + Heat (800°C) = Calcium Oxide + Carbon Dioxide  
 $\text{CaCO}_3 + \text{Heat} = \text{CaO} + \text{CO}_2$
- Quicklime + Water = Calcium Hydroxide + Heat  
 $\text{CaO} + \text{H}_2\text{O} = \text{Ca(OH)}_2$

## SUPPLY

Adelaide Brighton Hydrated Lime is available in the following forms:

- Bulk
- 20 kg multi-walled paper bags
- Nominal 800 kg capacity bulk bags

## SPECIFICATION

Adelaide Brighton Hydrated Lime is a high Calcium Lime complying with the Australian Standard Specification AS 1672.1 (Limes for Building).

All products are manufactured under a third party certified manufacturing and supply quality assurance system to AS/NZS ISO 9001 (NCS Certification No 6041).

## APPLICATIONS

Hydrated Lime, which is an extremely versatile chemical, is the most widely used and lowest cost alkali in the world. Major applications are listed over the page.

Lime is not toxic to workers and users, nor are air borne dust particles harmful to the public. After the minerals processing industry, lime's greatest use is for environmental clean up of water, waste water, air and solid wastes. It is also used for water softening and clarification.

In waste water treatment of sewage effluents, lime removes phosphorus and nitrogen. It also kills bacteria.

Lime absorbs and neutralises sulfur oxides from industrial stack gases, thereby beneficiating air quality.

## TYPICAL PROPERTIES

Chemical Composition		
Oxide	AS 1672.1-1997 Requirement	Typical Analysis %
SiO <sub>2</sub>	No requirement	1.8
Al <sub>2</sub> O <sub>3</sub>	No requirement	0.5
Fe <sub>2</sub> O <sub>3</sub>	No requirement	0.6
CaO	No requirement	72.0
MgO	No requirement	1.0
Loss On Ignition	No requirement	24.0
CO <sub>2</sub>	<5%	2.5

### Physical Properties

Fineness	Typical fineness is 0.1% retained on a 75 micron sieve and less than 0.05% on as 250 micron sieve
Specific Gravity	2.2-2.3
Bulk Density	400-600 kg/m <sup>3</sup>

## HANDLING AND STORAGE

Lime is used in various forms in a large number of diversified industries. Where daily requirements are small, it is preferable to use bagged lime because handling and storage is relatively simple. Storage areas for bagged lime must be covered to prevent ingress of moisture. In suitable (dry) storage, bagged hydrate may be stored for periods of up to one (1) year without serious deterioration.

At large lime consuming plants, bulk lime is more efficient and economic to use. The lime is usually handled by mechanical or pneumatic conveying systems, discharging to weather tight bins or silos.

## SAFETY INFORMATION

Hydrated Lime is an alkali and should be handled with some caution. Prolonged exposure can cause drying or chapping of the skin. Care should be taken to ensure that lime does not come into contact with the eyes.

If Hydrated Lime is to be handled in a way that workers may encounter dust, it is recommended that they wear snugly fitting safety goggles, filter masks and protective clothing.


For more information refer to the Safety Data Sheet for Hydrated Lime.

## AVAILABLE LIME INDEX

In accordance with the standard specification AS1672.1 Adelaide Brighton Hydrated Lime has an available lime index, expressed in terms of calcium hydroxide [Ca(OH)<sub>2</sub>] of 90% typically.

# HYDRATED LIME

## MAJOR APPLICATIONS FOR LIME

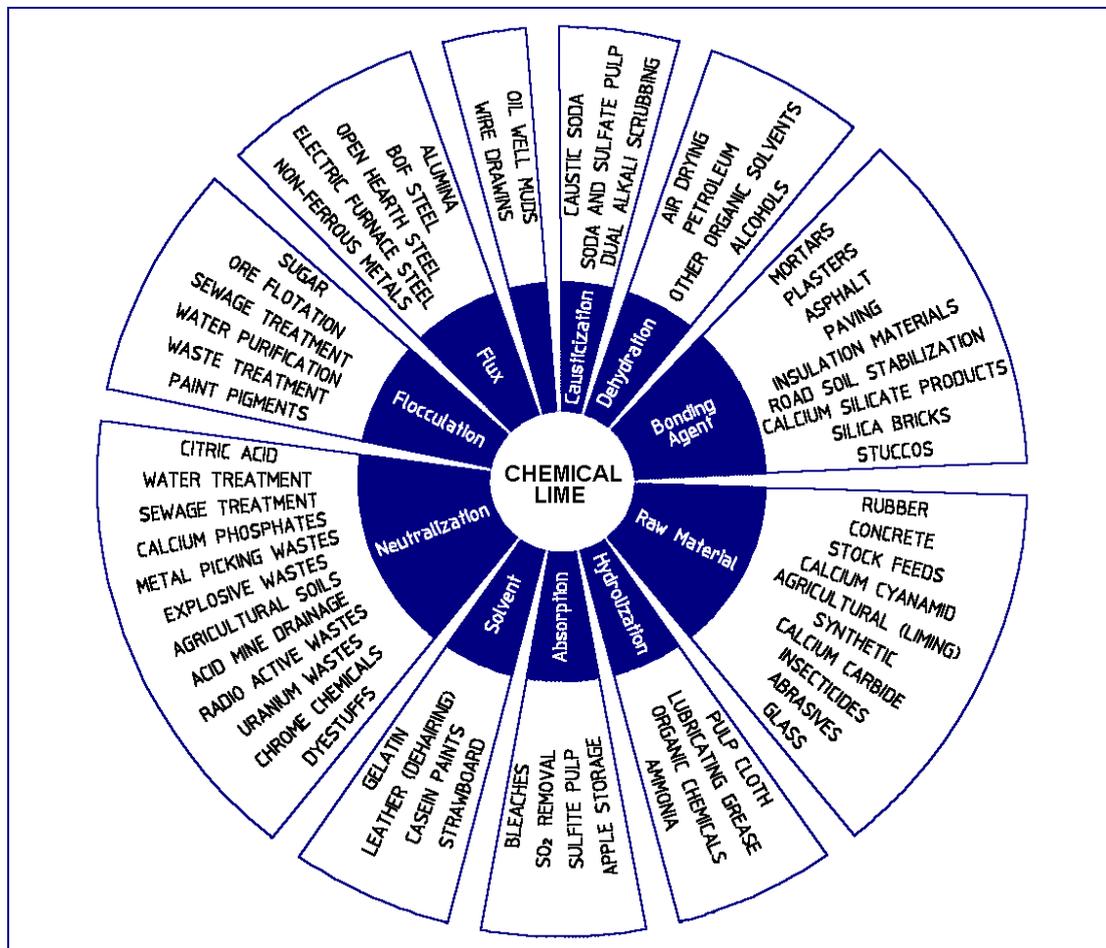

## CONTACT POINTS

For further information contact the Sales and Marketing Department at:

Adelaide Brighton Cement Ltd  
 ABN 96 007 870 199  
 62 Elder Road  
 BIRKENHEAD SA 5015

Telephone: 08 8300 0300

Facsimile: 08 8341 1591

Web Site: [www.adelaidebrighton.com.au](http://www.adelaidebrighton.com.au)

### DISCLAIMER

While the information in this Product Data Sheet has been prepared in good faith, Adelaide Brighton Cement Limited does not warrant that the information is accurate, complete or up to date. Each user of any information, or any product referred to, in this Product Data Sheet must:

- determine whether the information or product is suitable for their purpose;
- assess and control any risks associated with the information or product; and
- obtain professional advice in relation to the use of the information or product.

Failure to do so may result in serious damage or injury.

To the extent permitted by law, Adelaide Brighton Cement Limited:

- excludes all representations, warranties and guarantees in relation to any information in this Product Data Sheet; and
- will not be liable for any direct, indirect, consequential, incidental, special or economic loss (including but not limited to any loss of actual or anticipated profits, revenue, savings, production, business, opportunity, access to markets, goodwill, reputation, publicity, or use) arising from any use of or reliance on any information in this Product Data Sheet.

The Adelaide Brighton logo and Adelaide Brighton Cement are registered trade marks of Adelaide Brighton Limited and its related entities.